


TECHNICAL DATASHEET

BRISTAN

THERMOSTATIC POWER SHOWER 1000

Product Specification

Product Code:	HY POWSHX10 W
Finish:	White
Product Type:	Contemporary
Operation:	Push button start/stop (single rotary dial for temperature adjustment)
Power ratings:	230v AC@50Hz/3Amp/150W
Constructions:	Plastic (ABS) casing
Supply:	Low pressure gravity systems only
Inlet Connections:	15mm push-fit
Outlet Connection:	G ½"
Water Pressure:	Min. 0.1 bar, Max. 1.0 bar

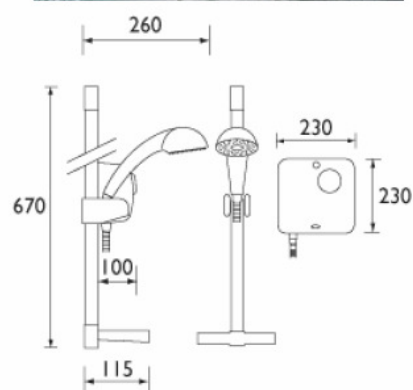

Additional Information

- 15 minute motor rating (unit will need to cool down if thermal cut out trips).
- Thermostatic shower with built in electric pump drawing water from gravity supplies .
- Thermostatic cartridge maintains showering temperature to +/- 1°C by compensating for changes in the incoming water temperature and pressure providing a stable outlet temperature.
- Automatic shut off in the event of hot or cold water supply failure, thus reducing the risk of injury.
- On/off operated by push button allowing temperature setting to remain the same after each use.
- Pipe access is from the right side only and the fitting are push-fit.
- Supplied with 1.5m hose, adjustable riser kit and 3 mode handset with rub clean nozzles. The riser rail has a built in soap tray, hose retainer and spirit level to assist in fitting and as it fits flush against the wall any previous fixing holes can be concealed.
- Under no circumstances should the power shower be connected to mains water supply.

Technical Advice: For further information please call 0844 7016273 or email customercare@bristan.com.
Guarantee: 2 years covering manufacturing faults.

Compliance/Approvals

WRAS
BEAB EMC: Certificate No. EE0084
BEAB Safety
CE Mark

Flow Rates (litres per minute)

System Pressure	Open Outlet
HY POWSHX10 W	10.0